


CATEGORY 6A U/UTP 23 AWG 500 Mhz OUTDOOR HORIZONTAL LAN CABLES

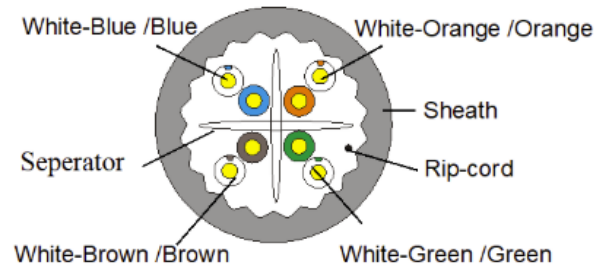

Product View

AGER CAT6A U/UTP 23AWG cables transmit data signals such as Data, Voice, and PoE at a speed of 10 Gbps over 500 MHz. Our cables meet the requirements of the globally recognized ANSI/TIA-568.2-D and ISO/IEC 11801 standards and is regularly subjected to quality tests by international testing organizations. Our cables also meet the requirements of IEC 61156-5 and EN 50288-5.

Supported Protocols

- IEEE 802.3an 10GBASE-T 10 Gigabit Ethernet
- TP-PMD
- 10BASE-T Ethernet
- 1000BASE-T Gigabit Ethernet
- 100BASE-T "Fast Ethernet"
- 100BASE-T2
- 100BASE-T4
- 100BASE-TX
- ATM 52
- ATM 25
- ATM 155
- Token Ring 100 Mbps
- Token Ring 4 Mbps and 16 Mbps
- Broadband and Baseband Video
- ISDN Basic and Primary Access
- 1BASE-5 Starlan
- ISALAN

Transmission Specifications and Product Shipment Information

Frekans	RL	ATT	NEXT	DELAY	PSNEXT	ELFEXT	PSELFEXT
MHz	≥ dB	≤ dB	≥ dB	≤ ns	≥ dB	≥ dB	≥ dB
1	20.0	-	74.3	570.0	72.3	67.8	64.8
4.0	23.0	3.8	65.3	552.0	63.3	55.8	52.8
8.0	24.5	5.3	60.8	546.7	48.8	49.7	46.7
10.0	25.0	5.9	59.3	545.4	57.3	47.8	44.8
16.0	25.0	7.5	56.2	543.0	54.2	43.7	40.7
20.0	25.0	8.4	54.8	542.1	52.8	41.8	38.8
25.0	24.3	9.54	53.3	541.2	51.3	39.8	36.8
31.25	23.6	10.5	51.9	540.4	49.9	37.9	34.9
62.5	21.5	15.0	47.4	538.6	45.4	31.9	28.9
100	20.1	19.1	44.3	537.6	42.3	27.8	24.8
200	18.0	27.6	39.8	536.5	37.8	21.8	18.8
250	17.3	31.1	38.3	536.3	36.3	19.8	16.8
300	16.8	34.3	37.1	536.1	35.1	18.3	15.3
500	15.2	45.3	33.8	535.6	31.8	13.8	10.8

CATEGORY 6A U/UTP 23 AWG 500 Mhz OUTDOOR HORIZONTAL LAN CABLES

PRODUCT SHIPMENT INFORMATION		
Product Code	Product Description	Outer Diameter
ACK6A-300-L5-GR	4x2x23# U/UTP CAT 6A LSOH Gray, 500m Reel	7.1 mm ± 0.4mm
ACK6A-300-L5-BL	4x2x23# U/UTP CAT 6A LSOH Blue, 500m Reel	7.1 mm ± 0.4mm
ACK6A-300-L5-YL	4x2x23# U/UTP CAT 6A LSOH Yellow, 500m Reel	7.1 mm ± 0.4mm
ACK6A-300-L5-RD	4x2x23# U/UTP CAT 6A LSOH Red, 500m Reel	7.1 mm ± 0.4mm

*This product is also available under the code AC-603-5-XX.
All AGER Copper transmission cables are in Standard Gray color and LSOH.
Upon request, production can be made in colors other than the above colors.

Cable Specifications

MECHANICAL AND PHYSICAL PROPERTIES	
BASIC CONDUCTOR	23AWG bare annealed copper, Solid
CONDUCTOR COLORS	Blue x Blue-White, Orange x Orange-White, Green x Green-White, Brown x Brown-White
INSULATION	Polyolefin
NUMBER OF INSULATED CONDUCTORS	8 wire, 4 pair (bended)
OVERALL TAPE WRAP	None
FOILED	None
OUTER JACKET	LSOH (LSZH) Low Smoke Halogen Free
OUTER JACKET COLOR	Gray RAL 7035 (Other colors available upon request.)
GROUNDING	None
BETWEEN PAIRS	Plastic Separator
CABLE SURFACE MARKING	Brand, Product Code, Cable Type, Standards, Meter, Batch Number
OUTER JACKET DIAMETER	7.1 mm ± 0.4mm
OPERATING TEMPERATURE	- 20 , +60 C
STORAGE TEMPERATURE	- 20 , +80 C
TENSILE STRENGTH	50 N / mm ² max
BENDING RADIUS (Short Term)	8 x OD (mm)
BENDING RADIUS (Long Term)	4 x OD (mm)
FLAME TEST	IEC 60332-1
CONDUCTOR SIZE TEST	UL 444

Electrical Properties

ELECTRICAL AND TRANSMISSION PROPERTIES	
INPUT IMPEDANCE	100±6 Ohm @ 1-500 MHz
INSULATION RESISTANCE	5000 MegaOhm•Km min. @ 500 Vdc
DC DIRENCİ	93 Ohm/km max.
RESISTANCE UNBALANCE	%2 max.
CAPACITANCE	45 pF/m nom. @ 1 KHz
CAPACTANCE UNBALANCE	1500 pF/Km max. @ 1 KHz.
VOLTAGE RATING	72 V max
DIELECTRIC STRENGTH	1700 Volts AC / 2 Sec.
VELOCITY OF PROPAGATION	% 77 - 78 Min.
PROPAGATION DELAY	534 + 36/1½ nS/100m max. 1-250 MHz
PROPAGATION DELAY SKEW	45 nS/100m max.