

19" RACK CABINET SOLUTIONS

OPEN FRAME SERIES

SERVER RACKS | NETWORK CABINETS | DATA CENTER SOLUTIONS



ENGINEERING SOLUTIONS FOR CRITICAL SYSTEMS



CE



RoHS
COMPLIANT



ISO
9001:2015



RELIABLE
PRODUCTION

**AGER**FREE STANDING **OPEN FRAME** SERIES

FREE STANDING **OPEN FRAME** SERIES



AGER OPEN FRAME Series suitable solution for maximum cabling and networking infrastructure, Offers a more economical solution compared to the closed cabinet structure flat pack shipping is available.



Color Options

RAL7035 Light Gray

RAL9005 Black



Usage Area

Suitable for use in no need of a closed enclosure due to security climatized and dust-free conditions. Offer easy maintaining and functional structure. Offers a more economical solution compared to the closed cabinet structure.

19" Structure

All 19" devices, accessories and equipment are compatible with the structure.

Economic Solution

It offers a more economical solution than closed rack cabinet structure.

Disassembled Shipment

There is an advantage of economical shipment thanks to the disassembled shipment option.

Floor Theme


It can be fixed to the floor. Optionally, it can be used with pinion foot and wheel group. In this way, it provides compatibility with all kinds of floor configurations.

Easy Access

The open structure of all surfaces provides easy access to your devices.


Loading Capacity

Recommended up to 600 kg loading capacity

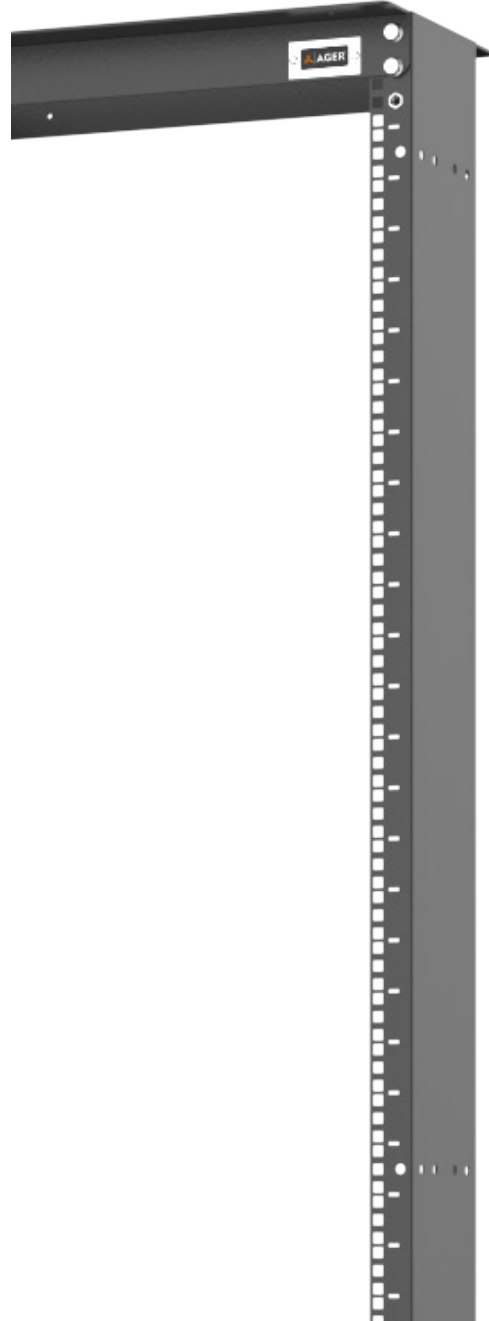





AG-OF42US380

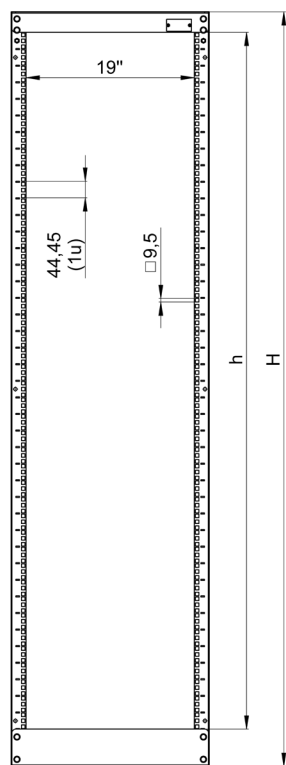


Front View

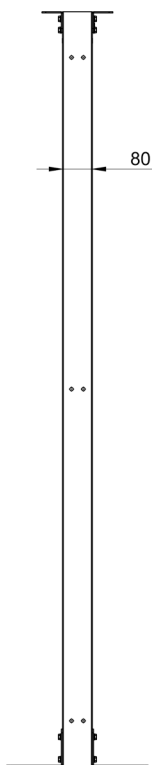


Side View

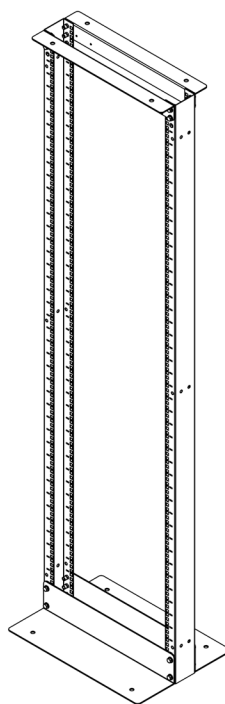


Iso View

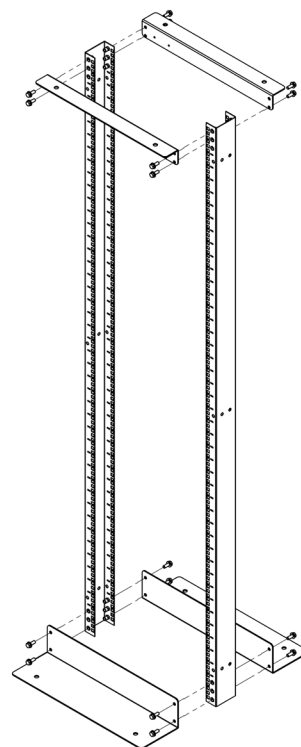

Exploded View

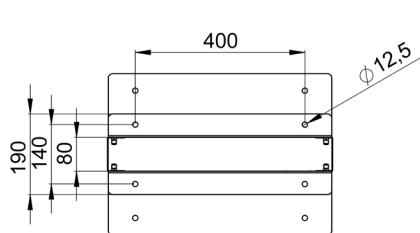


Top View

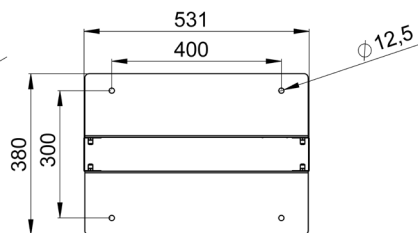


Bottom View


AG-OF42US460-S1

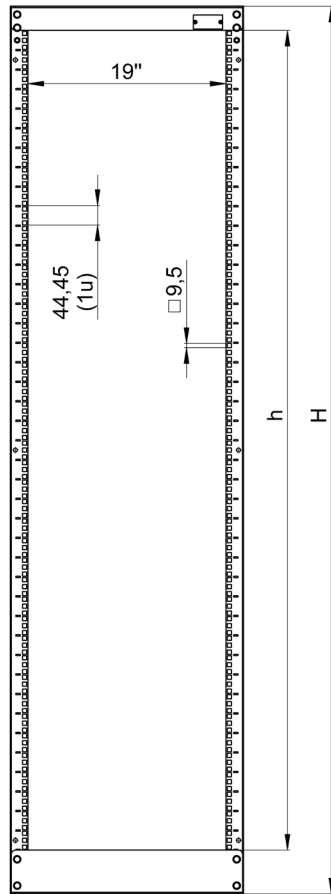


Front View

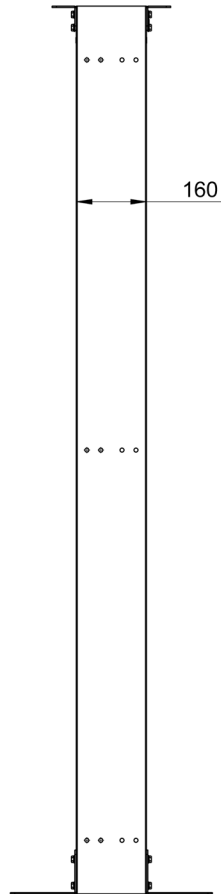


Side View

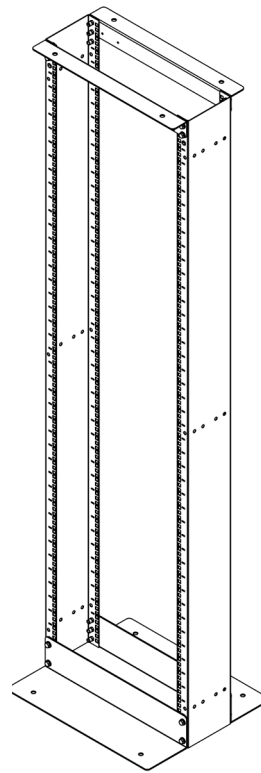


Iso View

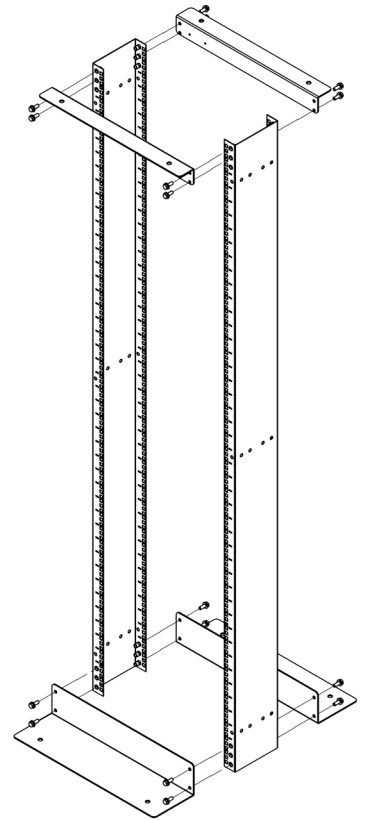

Exploded View

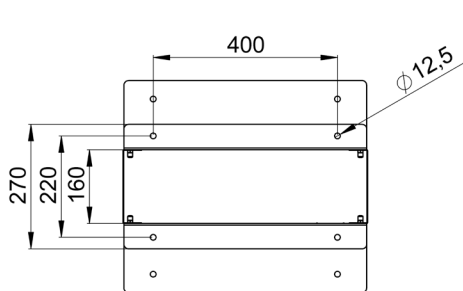

Top View

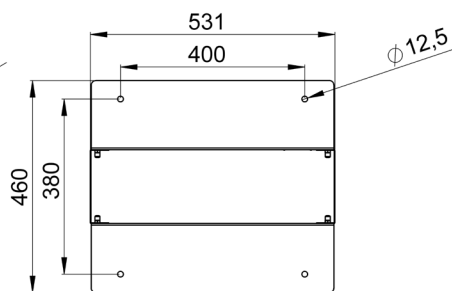

Bottom View



19" Open Frame Single Frame							
Product Code	Product Description	Çocuk (U)	Width (W) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)	Weight (Gross) (kg)
AG-OF36US380-XX-YY	36U Open Frame Single Frame D=380mm	36U	530	380	1756	15	16,5
AG-OF42US380-XX-YY	42U Open Frame Single Frame D=380mm	42U	530	380	2022	16	17,5
AG-OF45US380-XX-YY	45U Open Frame Single Frame D=380mm	45U	530	380	2155	16,5	18
AG-OF48US380-XX-YY	48U Open Frame Single Frame D=380mm	48U	530	380	2289	17	18,5
AG-OF36US460-XX-YY	36U Open Frame Single Frame D=460mm	36U	530	460	1756	18,5	19,8
AG-OF42US460-XX-YY	42U Open Frame Single Frame D=460mm	42U	530	460	2022	20	20,3
AG-OF45US460-XX-YY	45U Open Frame Single Frame D=460mm	45U	530	460	2155	20,7	22
AG-OF48US460-XX-YY	48U Open Frame Single Frame D=460mm	48U	530	460	2289	21,4	22,7

XX = Color Code, B1 White refers to RAL 7035, S1 Black refers to RAL 9005, this information should be conveyed to the representative at the order stage.
YY = M1 is used for assembled shipment and D1 is used for disassembled shipment.







AGER

FREE STANDING OPEN FRAME SERIES


AG-OF42UDD670

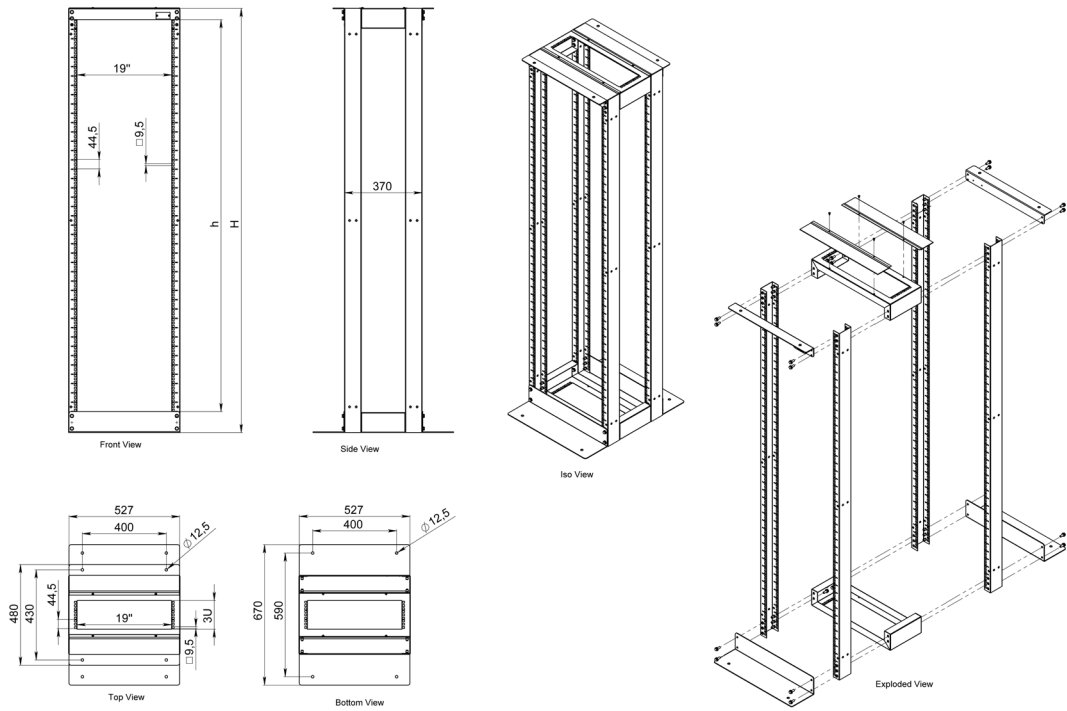

AG-OF42UDD870

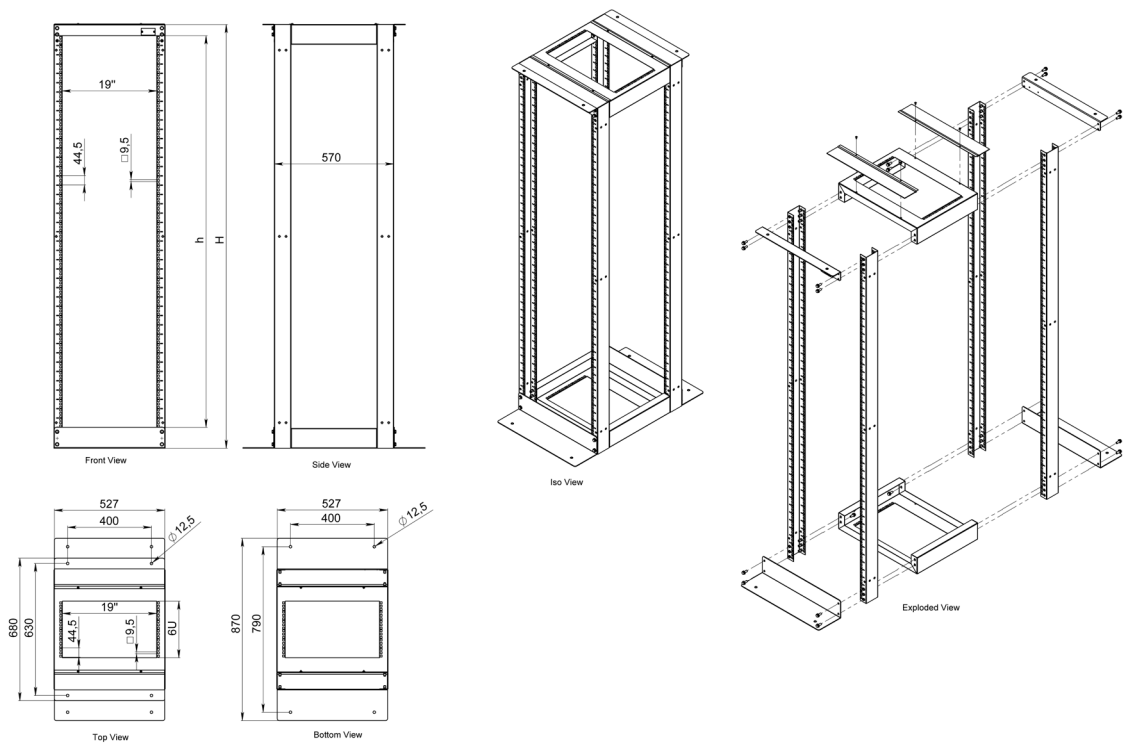

AG-OF42UDD1070

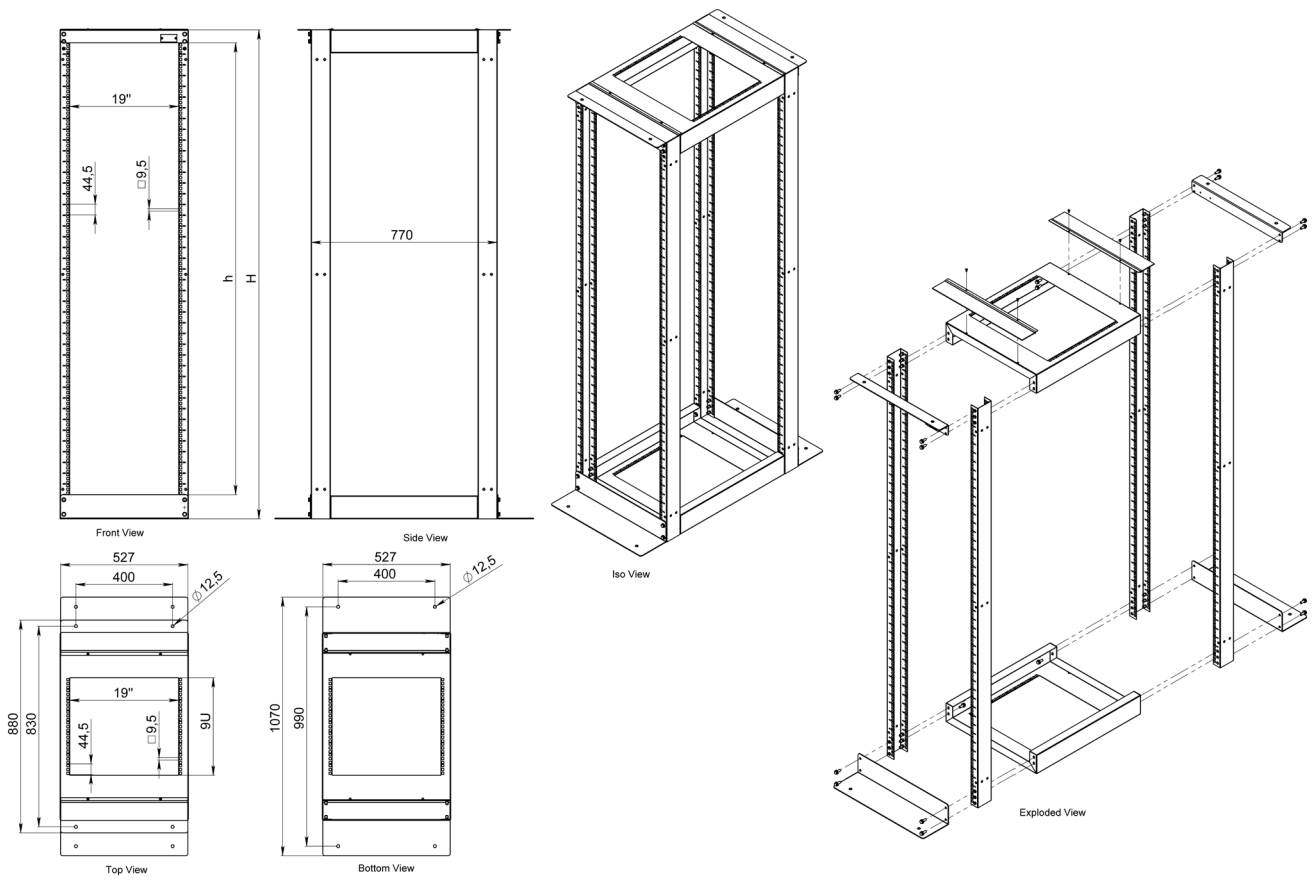




19" Open Frame Double Frame


Product Code	Product Description	Çocuk (U)	Width (W) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)	Weight (Gross) (kg)
AG-OF36UD670-XX-YY	36U Open Frame Double Frame D=670mm	36U	530	670	1756	25	26,3
AG-OF42UD670-XX-YY	42U Open Frame Double Frame D=670mm	42U	530	670	2022	27	28,3
AG-OF45UD670-XX-YY	45U Open Frame Double Frame D=670mm	45U	530	670	2155	28	29,3
AG-OF48UD670-XX-YY	48U Open Frame Double Frame D=670mm	48U	530	670	2289	29	30,3
AG-OF36UD870-XX-YY	36U Open Frame Double Frame D=870mm	36U	530	870	1756	27	28
AG-OF42UD870-XX-YY	42U Open Frame Double Frame D=870mm	42U	530	870	2022	29	30
AG-OF45UD870-XX-YY	45U Open Frame Double Frame D=870mm	45U	530	870	2155	30	31
AG-OF48UD870-XX-YY	48U Open Frame Double Frame D=870mm	48U	530	870	2289	31	32
AG-OF36UD1070-XX-YY	36U Open Frame Double Frame D=1070mm	36U	530	1070	1756	29	30
AG-OF42UD1070-XX-YY	42U Open Frame Double Frame D=1070mm	42U	530	1070	2022	31	32
AG-OF45UD1070-XX-YY	45U Open Frame Double Frame D=1070mm	45U	530	1070	2155	32	33
AG-OF48UD1070-XX-YY	48U Open Frame Double Frame D=1070mm	48U	530	1070	2289	33	34

XX = Color Code, B1 White refers to RAL 7035, S1 Black refers to RAL 9005, this information should be conveyed to the representative at the order stage.
YY = M1 is used for assembled shipment and D1 is used for disassembled shipment.


Top View D:670 mm

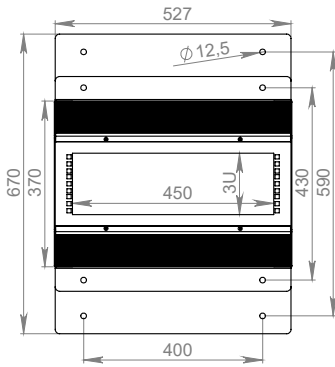


Isometric View D:670 mm

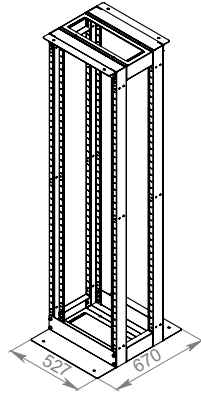


W:135 mm Finger Cable Management

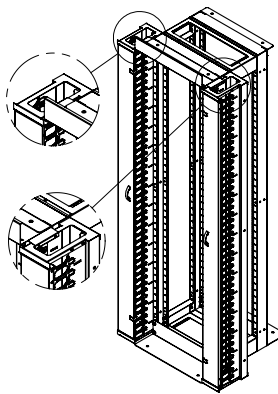


W:235 mm Finger Cable Management

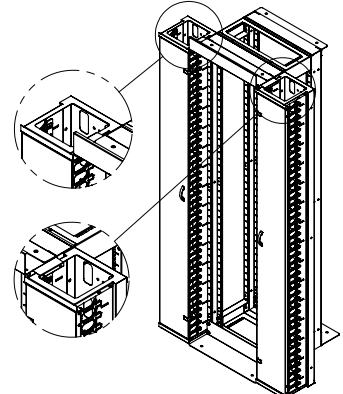


Top View D:870 mm

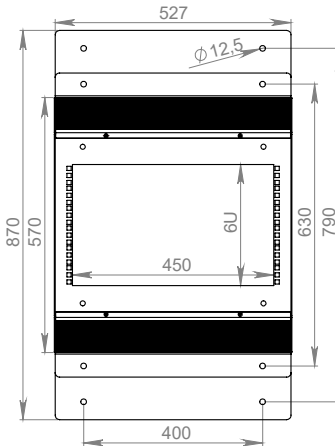


Isometric View D:870 mm

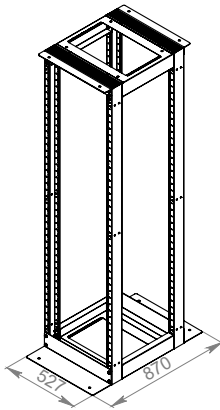


W:135 mm Finger Cable Management

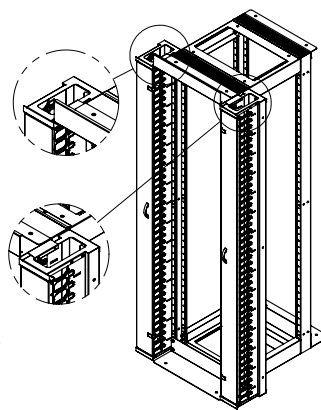


W:235 mm Finger Cable Management

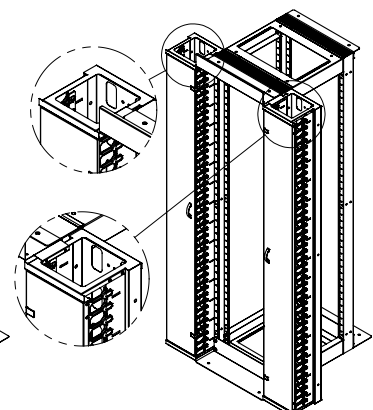


Top View D:1070 mm

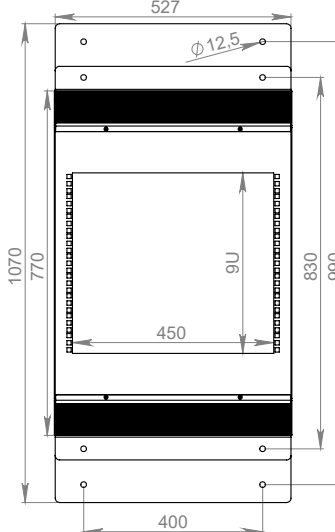


Isometric View D:1070 mm

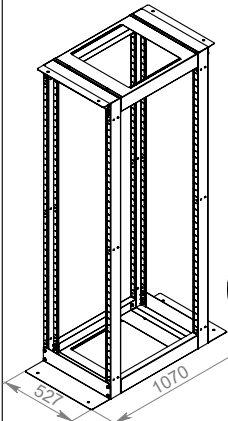

W:135 mm Finger Cable Management

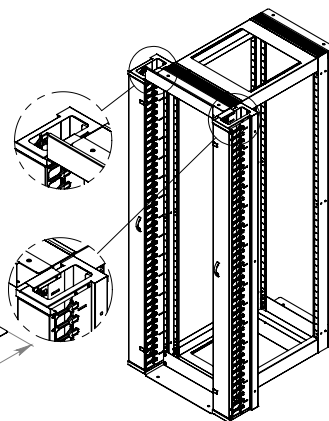

W:235 mm Finger Cable Management

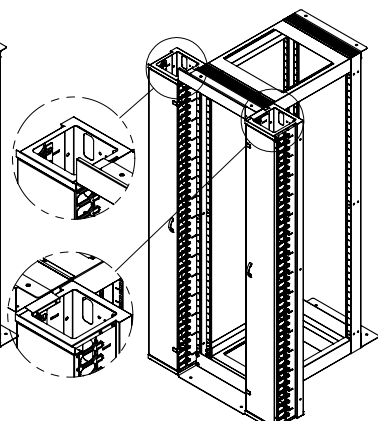





AGER

FREE STANDING OPEN FRAME SERIES


Using 3U 19" provision on the top for accessories
(Case Study)

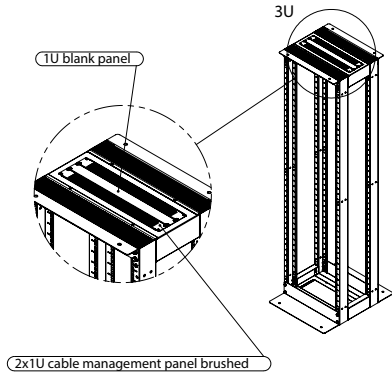


Using 6U 19" provision on the top for accessories
(Case Study)

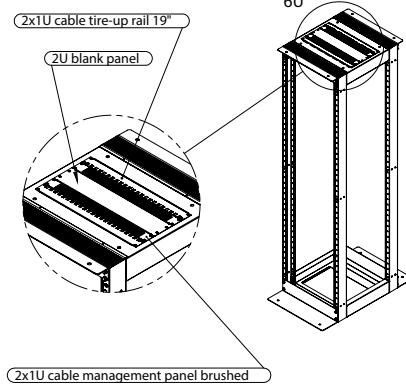


Using 9U 19" provision on the top for accessories
(Case Study)

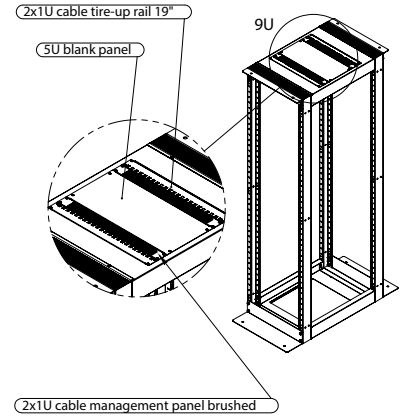


W:135 mm Finger Style Cable Manager

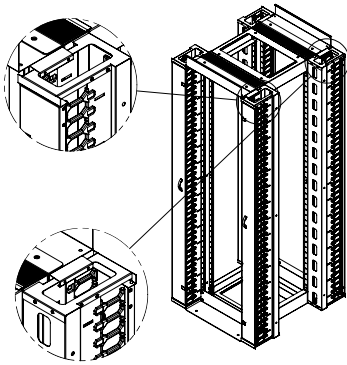


W:235 mm Finger Style Cable Manager

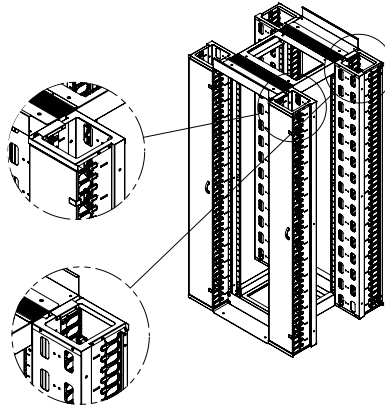


Using Finger Style Cable Manager as a common cable manager for side by side stacked frame

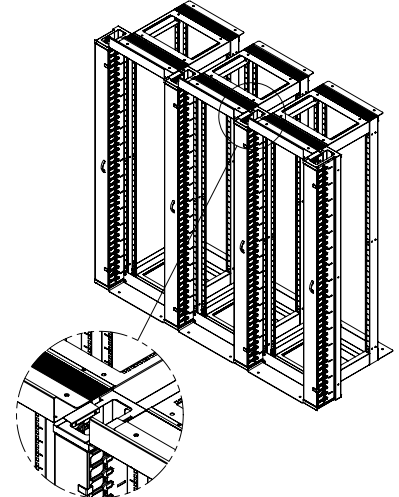


Integration of Leveling Feet / Caster Set

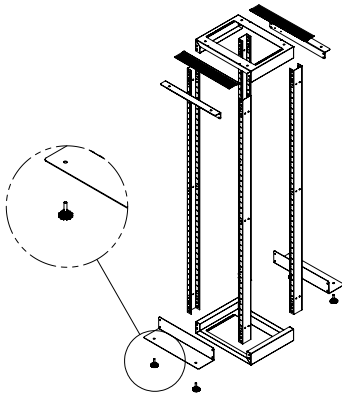


Integration of additional Leveling Feet for increasing Loading capacity without fixing frame to the floor

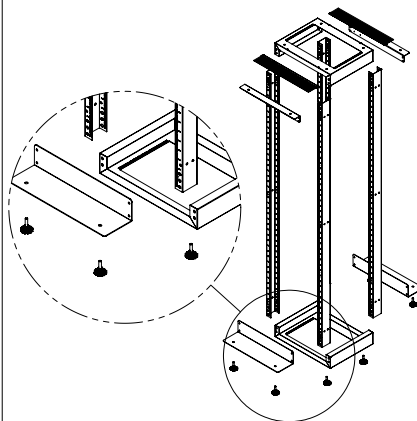


Fixing of Frame to the floor

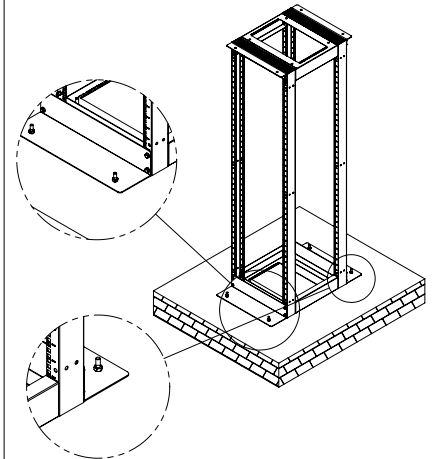


Isometric View D:670 mm

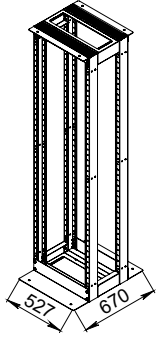


%63 Perforated
Front/Rear door application

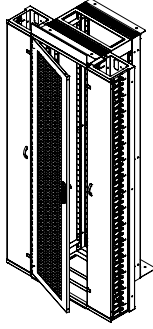


Solid side panel application




52 mm sized honeycomb
Side panel for airflow




Isometric View D:870 mm

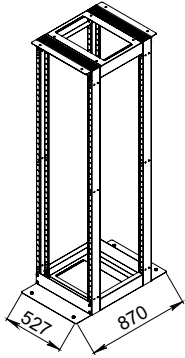


%63 Perforated
Front/Rear door application

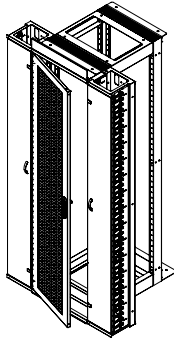


Solid side panel application

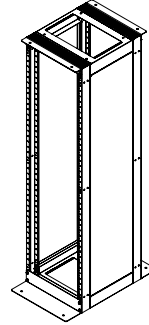


52 mm sized honeycomb
Side panel for airflow

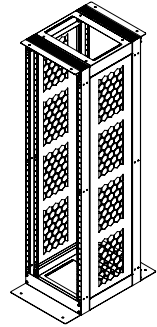


Isometric View D:1070 mm

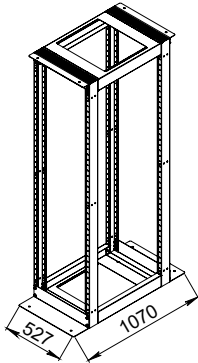


%63 Perforated
Front/Rear door application

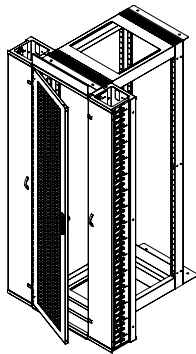



Solid side panel application



52 mm sized honeycomb
Side panel for airflow










BOTTOM VIEW


2U plastic cable organizer




Top cable through header unit

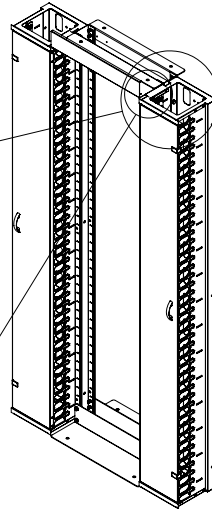


ISOMETRIC VIEW

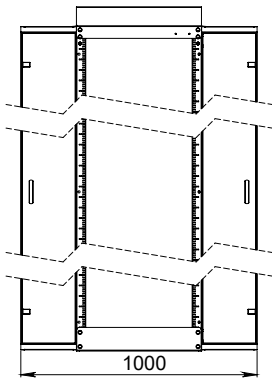


FRONT VIEW




SIDE VIEW

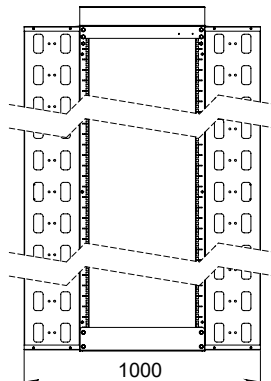


REAR VIEW

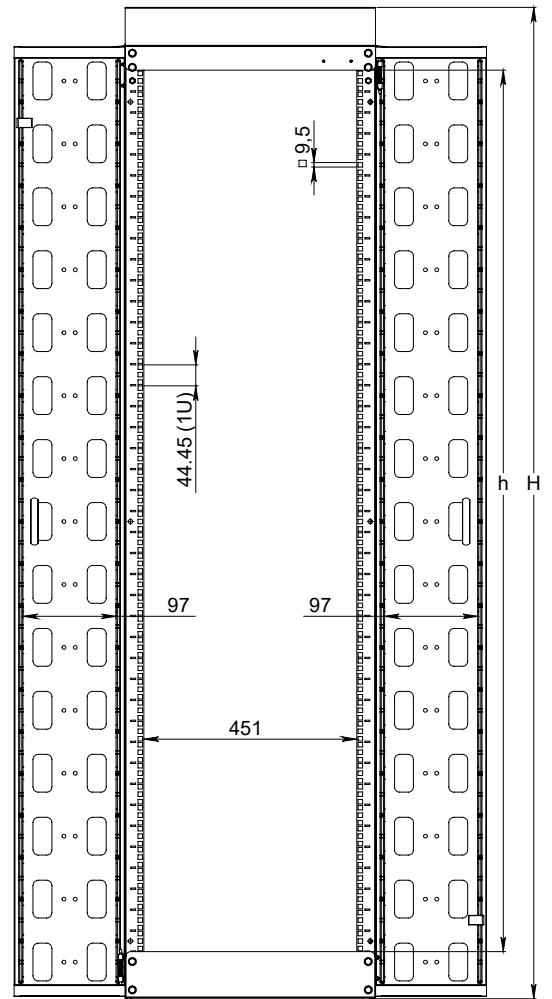


DIMENSIONS IN
WIDTH AND HEIGHT




TOP VIEW

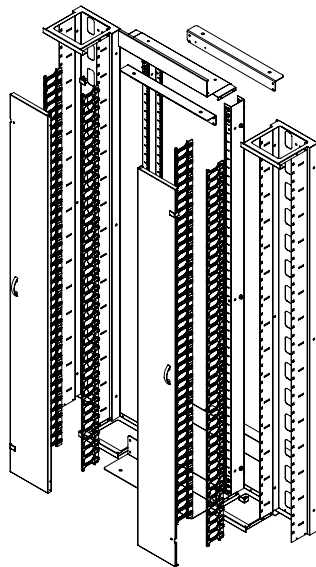

EXPLODED VIEW

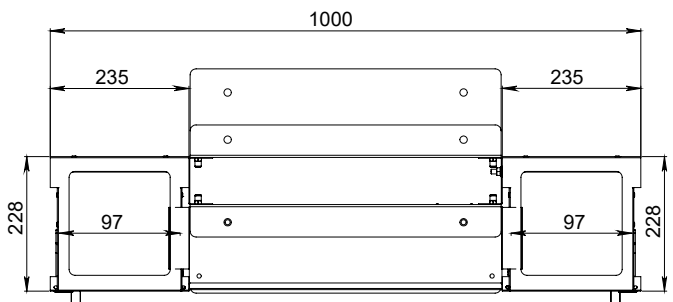

TOP VIEW
DIMENSIONS

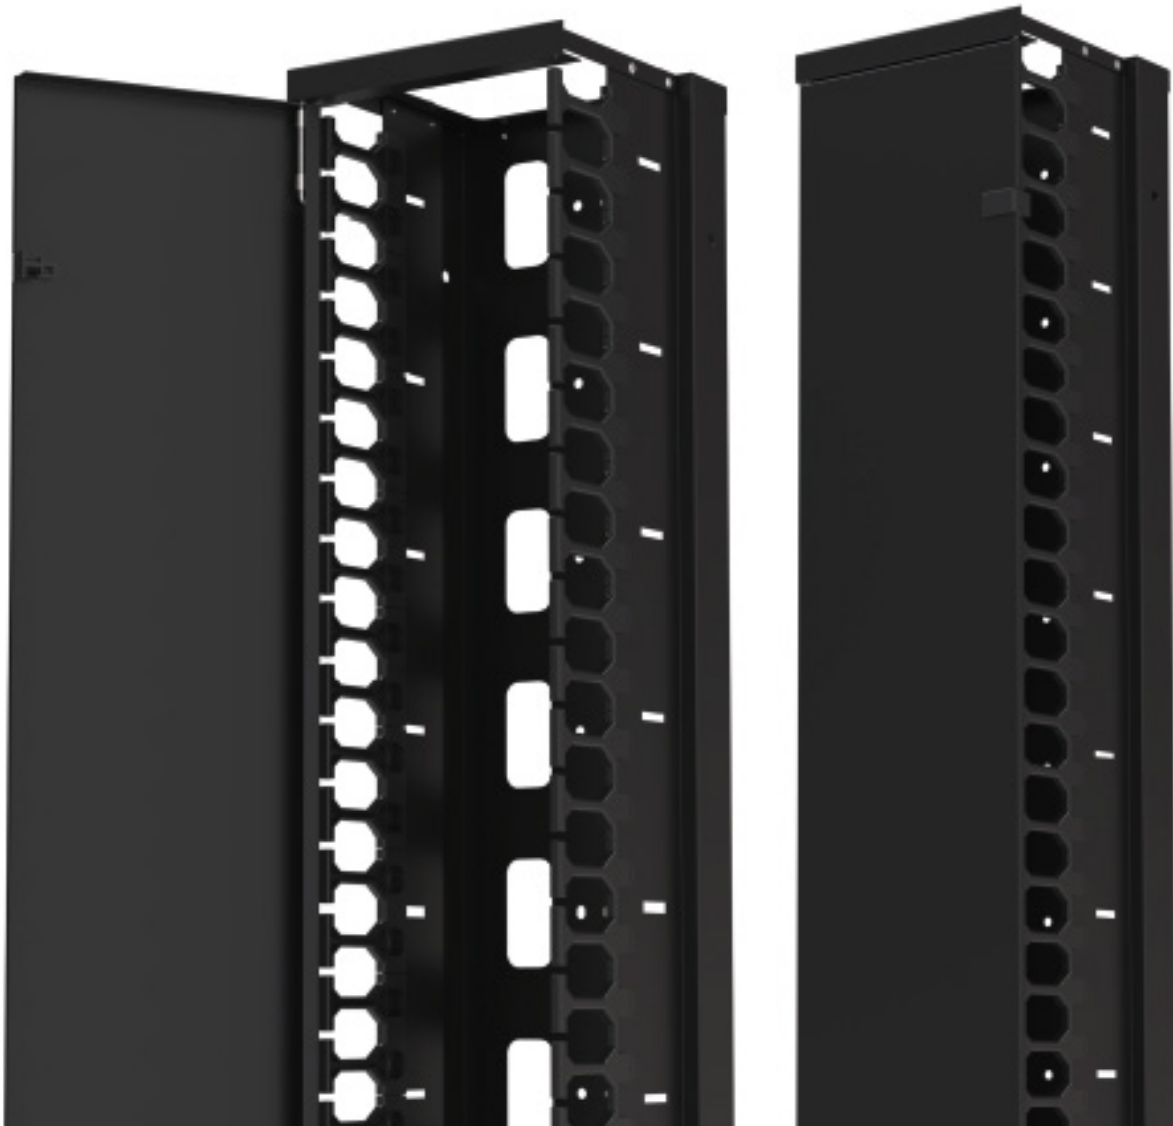

19" OPEN FRAME FREE STANDING FINGER ORGANIZER

Product Code	Product Description	U Size (U)	Width (w) (mm)	Depth (D) (mm)	Height(H) (mm)	Weight (Net) (kg)	Weight (Gross) (kg)
AG-FORG16U135-A	16U Open Frame Free Standing Finger Organizer	16U	530	380	1756	22,5	23,5
AG-FORG36U135-A	36U Open Frame Free Standing Finger Organizer	36U	530	380	2022	23,5	24
AG-FORG42U135-A	42U Open Frame Free Standing Finger Organizer	42U	530	380	2155	24,1	25,6
AG-FORG47U135-A	47U Open Frame Free Standing Finger Organizer	47U	530	380	2289	24,7	26,2
AG-FORG16U235-A	16U Open Frame Free Standing Finger Organizer	16U	530	380	1756	22,5	23,5
AG-FORG36U235-A	36U Open Frame Free Standing Finger Organizerr	36U	530	380	2022	23,5	24
AG-FORG42U235-A	42U Open Frame Free Standing Finger Organizer	42U	530	380	2155	24,1	25,6
AG-FORG47U235-A	47U Open Frame Free Standing Finger Organizer	47U	530	380	2289	24,7	26,2

XX = Color Code, B1 White refers to RAL 7035, S1 Black refers to RAL 9005, this information should be conveyed to the representative at the order stage.
YY = M1 is used for assembled shipment and D1 is used for disassembled shipment.