AGER

FIBER OPTIC TERMINATION BOXES

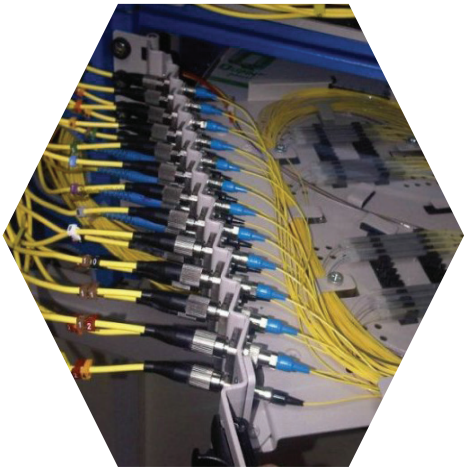

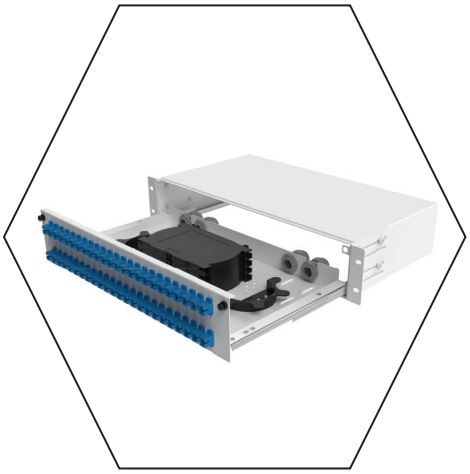

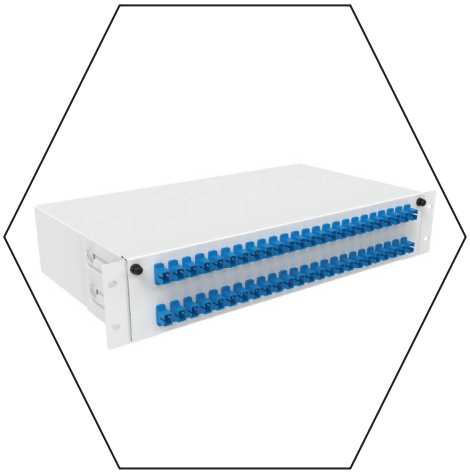

PCA PARTNERS CERTIFICATE ASSURANCE

RoHS compliant

Lvt

CE

Colour Options

RAL7035 Açık Gri	RAL9005 Siyah

19”SPLICE BOXES A TYPE SERIES

General Structure

A Type Termination panels ease fiber termination due to the sliding mechanismand removable front panel and provide low-cost professional cable management. These panels are specially produced for simple installation and easy access.

On the removable front panel slots can be applied according to the desired adapter type. The adapter holes are vertical position.

Sliding internal tray can be used with snap lock or screws on the two sides while the general preferences is snap lock type.Removing the internal tray from the body by moving it up for 45 degree only ease of use during installation is enable.

Fiber optic panels enable easy access for the additional patch cables and trays even after installation to the cabinets or field termination enclousers

Specifications

1U, 2U and 3U versions (12, 24, 36, 48 and 72 port capacity)
Smooth and convenient mechanical sliding system
Manages small & large quantities of fiber with a high packing density
Modular design
Cable glands to secure the incoming fiber, allows min movement
Fiber guide tubes to protect and direct the fibers to the cassettes in a professional way
Minimum bend radius of fibers and strain relief for all entry cables
Fiber bend radius control – < 35mm • Capacity of up to 72 ports • All known connector types such as SC, FC, ST, E2000, LC, MU etc. are possible.

Includes

1xM6 screw and nut set(4pcs)
1xPG16 PVC Gland



Bottom View



Side View



Front View



Side View

Rear View



Top View

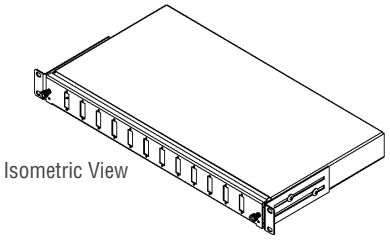

Isometric View

19" A Type Fiber Optic Splice Box							
Product Code	Product Description	(U)	Port	Width(W) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)
AG-F001U12SCD-A-XX	A Type 01U 12 Port SC Dublex Fiber Optic Splice Box	01	12	482	240	44,45	2
AG-F001U12SCS-A-XX	A Type 01U 12 Port SC Simplex Fiber Optic Splice Box	01	12	482	240	44,45	2
AG-F001U12ST-A-XX	A Type 01U 12 Port ST Fiber Optic Splice Box	01	12	482	240	44,45	2
AG-F001U24SCD-A-XX	A Type 01U 24 Port SC Dublex Fiber Optic Splice Box	01	24	482	240	44,45	2
AG-F001U24SCS-A-XX	A Type 01U 24 Port SC Simplex Fiber Optic Splice Box	01	24	482	240	44,45	2
AG-F001U24ST-A-XX	A Type 01U 24 Port ST Fiber Optic Splice Box	01	24	482	240	44,45	2
AG-F002U48SCD-A-XX	A Type 02U 48 Port SC Dublex Fiber Optic Splice Box	02	48	482	240	88,9	2,8
AG-F002U48SCS-A-XX	A Type 02U 48 Port SC Simplex Fiber Optic Splice Box	02	48	482	240	88,9	2,8
AG-F002U48ST-A-XX	A Type 02U 48 Port ST Fiber Optic Splice Box	02	48	482	240	88,9	2,8
AG-F003U72SCD-A-XX	A Type 03U 72 Port SC Dublex Fiber Optic Splice Box	03	72	482	240	133,35	3,6
AG-F003U72SCS-A-XX	A Type 03U 72 Port SC Simplex Fiber Optic Splice Box	03	72	482	240	133,35	3,6
AG-F003U72ST-A-XX	A Type 03U 72 Port ST Fiber Optic Splice Box	03	72	482	240	133,35	3,6

XX = Colour Code, B1 White RAL 7035, S1 Black RAL 9005, during order please specify the colour choice

19”SPLICE BOXES B TYPE SERIES

General Structure

B Type Termination panels ease fiber termination due to the sliding mechanismand removable front panel and provide low-cost professional cable management. These panels are specially produced for simple installation and easy access.

On the removable front panel slots can be applied according to the desired adapter type. The adapter holes are 45 degree.

Sliding internal tray can be used with snap lock or screws on the two sides while the general preferences is snap lock type.Removing the internal tray from the body by moving it up for 45 degree only ease of use during installation is enable.

Fiber optic panels enable easy access for the additional patch cables and trays even after installation to the cabinets or field termination enclousers

Specifications

1U, 2U and 3U versions (12, 24, 36, 48 and 72 port capacity)
Smooth and convenient mechanical sliding system
Manages small & large quantities of fiber with a high packing density
Modular design
Cable glands to secure the incoming fiber, allows min movement
Fiber guide tubes to protect and direct the fibers to the cassettes in a professional way
Minimum bend radius of fibers and strain relief for all entry cables
Fiber bend radius control – < 35mm • Capacity of up to 72 ports • All known connector types such as SC, FC, ST, E2000, LC, MU etc. are possible.

Includes

1xM6 screw and nut set(4pcs)
1xPG16 PVC Gland

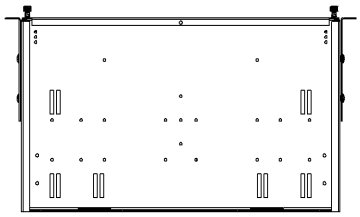

Bottom View



Side View



Front View



Side View

Rear View

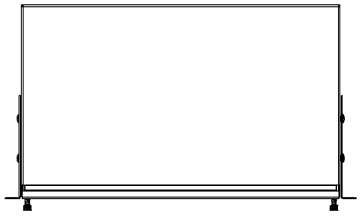

Top View

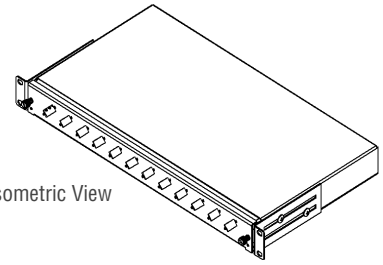

Isometric View

19" B Type Fiber Optic Splice Box							
Product Code	Product Description	(U)	Port	Width(W) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)
AG-F001U12SCD-B-XX	B Type 01U 12 Port SC Dublex Fiber Optic Splice Box	01	12	482	240	44,45	2
AG-F001U12SCS-B-XX	B Type 01U 12 Port SC Simplex Fiber Optic Splice Box	01	12	482	240	44,45	2
AG-F001U12ST-B-XX	B Type 01U 12 Port ST Fiber Optic Splice Box	01	12	482	240	44,45	2
AG-F001U12SCD-B-XX	B Type 01U 24 Port SC Dublex Fiber Optic Splice Box	01	24	482	240	44,45	2
AG-F001U12SCS-B-XX	B Type 01U 24 Port SC Simplex Fiber Optic Splice Box	01	24	482	240	44,45	2
AG-F001U12ST-B-XX	B Type 01U 24 Port ST Fiber Optic Splice Box	01	24	482	240	44,45	2
AG-F002U48SCD-B-XX	B Type 02U 48 Port SC Dublex Fiber Optic Splice Box	02	48	482	240	88,9	2,8
AG-F002U48SCS-B-XX	B Type 02U 48 Port SC Simplex Fiber Optic Splice Box	02	48	482	240	88,9	2,8
AG-F002U48ST-B-XX	B Type 02U 48 Port ST Fiber Optic Splice Box	02	48	482	240	88,9	2,8
AG-F003U72SCD-B-XX	B Type 03U 72 Port SC Dublex Fiber Optic Splice Box	03	72	482	240	133,35	3,6
AG-F003U72SCS-B-XX	B Type 03U 72 Port SC Simplex Fiber Optic Splice Box	03	72	482	240	133,35	3,6
AG-F003U72ST-B-XX	B Type 03U 72 Port ST Fiber Optic Splice Box	03	72	482	240	133,35	3,6

XX = Colour Code, B1 White RAL 7035, S1 Black RAL 9005, during order please specify the colour choice

19”SPLICE BOXES C TYPE SERIES

General Structure

C type Fiber optic splice boxes provide professional cable management and easy fiber termination availability with the telescopic rail structure and 1U, 2U, 3U, 4U options. Internal tray is installed on telescopic rails to provide a smoother movability inside and outside.

Due to Special design, the gland lug used on the left and right for cable inlets is removed and net width of the panel is kept. Special designed 45 angled adapter modules provide easy access to thee optic interconnection cables and splice cassette and pigtails when the tray is opened

Specifications

1U, 2U, 3U and 4U versions (12, 24, 36 and 48 port capacity)
Compatible for all 19”
Professional and advanced cable management with 45 degree adaptor interface
Angled adaptor interface protects your eyes from undesired contact with laser beam coming from the adaptors-Laser safety!
Screw connection system provide easy opening of front panel.
Easy access with telescopic rail pull-out system.
Special protection tubes and bend radien for protecting the incoming fiber from bending
Bakımı ve genişletmesi kolay
Professional cable storage and protection for minumum bending in panel
Fiber bend radius control of 35mm
All known connector types such as SC, FC, ST, E2000, LC, MU etc. are possible

Includes

1xM6 screw and nut set(4pcs)
1xPG16 PVC Gland

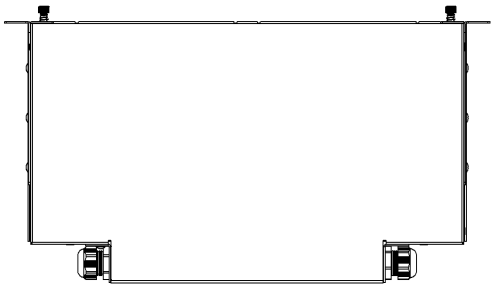

Bottom View



Side View

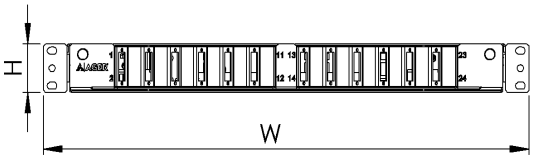

Front View



Side View

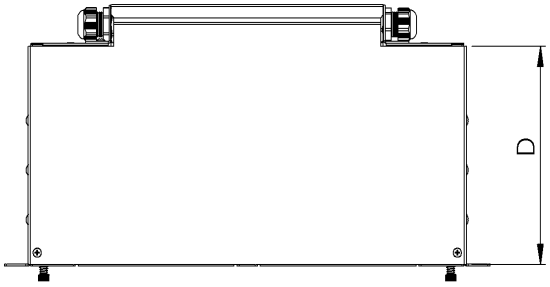

Top View

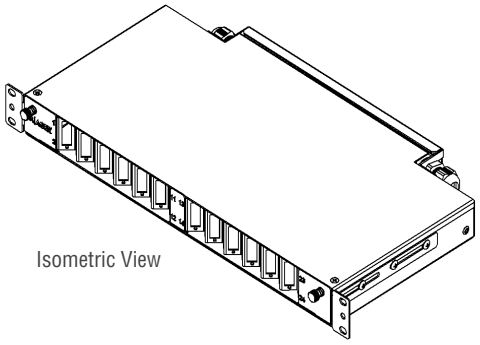

Isometric View

19" C Type(Angled) Fiber Optic Splice Box							
Product Code	Product Description	(U)	Port	Width(W) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)
AG-FO01U12SCD-C-XX	C Type(Angled) 01U 12 Port SC Dublex Fiber Optic Splice Box	01	12	482	240	44,45	4
AG-FO01U12SCS-C-XX	C Type(Angled) 01U 12 Port SC Simplex Fiber Optic Splice Box	01	12	482	240	44,45	4
AG-FO01U12ST-C-XX	C Type(Angled) 01U 12 Port ST Fiber Optic Splice Box	01	12	482	240	44,45	4
AG-FO02U24SCD-C-XX	C Type(Angled) 02U 24 Port SC Dublex Fiber Optic Splice Box	02	24	482	240	88,9	4,8
AG-FO02U24SCS-C-XX	C Type(Angled) 02U 24 Port SC Simplex Fiber Optic Splice Box	02	24	482	240	88,9	4,8
AG-FO02U24ST-C-XX	C Type(Angled) 02U 24 Port ST Fiber Optic Splice Box	02	24	482	240	88,9	4,5
AG-FO03U36SCD-C-XX	C Type(Angled) 03U 36 Port SC Dublex Fiber Optic Splice Box	03	36	482	240	133,35	5,6
AG-FO03U36SCS-C-XX	C Type(Angled) 03U 36 Port SC Simplex Fiber Optic Splice Box	03	36	482	240	133,35	5,6
AG-FO03U36ST-C-XX	C Type(Angled) 03U 36 Port ST Fiber Optic Splice Box	03	36	482	240	133,35	5,6
AG-FO04U48SCD-C-XX	C Type(Angled) 04U 48 Port SC Dublex Fiber Optic Splice Box	04	48	482	240	177,8	6,4
AG-FO04U48SCS-C-XX	C Type(Angled) 04U 48 Port SC Simplex Fiber Optic Splice Box	04	48	482	240	177,8	6,4
AG-FO04U48ST-C-XX	C Type(Angled) 04U 48 Port ST Fiber Optic Splice Box	04	48	482	240	177,8	6,4

XX = Colour Code, B1 White RAL 7035, S1 Black RAL 9005, during order please specify the colour choice

19”RACK SPLICE BOXES D TYPE SERIES

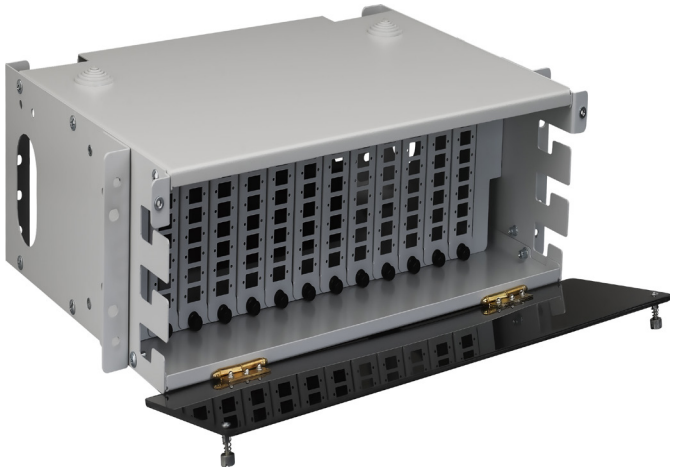

General Structure

D Type Fiber Optic Termination Panels are the products designed for the installation on 19” and 21” racks with the availability for mounting on the front and back with adjustable side lugs. Removable front port module and snap lock structure enables easier fiber optic termination for different capacities. Standard metal fornt panel can be changed with plexiglass upon request. 40x70mm ellipsis cable entries located on the left, right and back and two PG21 gland holes provide a flexible use. These holes are covered with bendable plugs on the delivery.

Specifications

Modular structure designed for 19” and 21” ETSI optical distribution frames
Outstanding cable management with maximum fiber optic termination availability
Capacity;
3U 72/96 ports
4U 108/144 ports
6U 162/216 ports
12 / 24 ports slim splice cassette
Minimum cablo movement
Lazere karşı güvenlik için açılı adaptör ara yüzü
21” converter brackets
Screw and spring hinge forntcover
Metal fornt cover(standard)
Plexiglass front over
LC, FC, ST, MTRJ, E-2000 etc modules

Includes

1u 21” ETSI converter side lugs 2 pcst
M6 screw and nut set (4 pcs) 1 set
M4x10 casette screw 2 pcs
Bendable plug 4 pcs

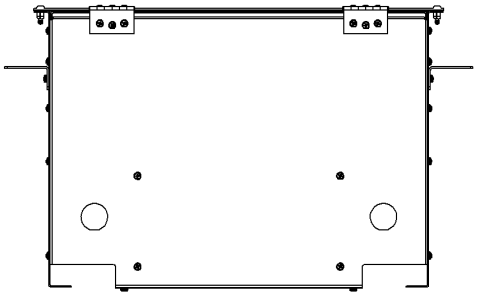

Bottom View



Side View

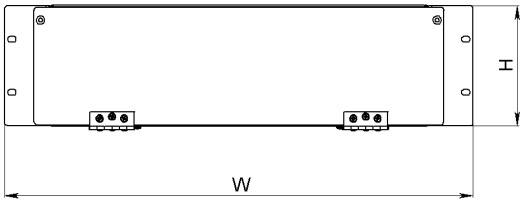

Front View



Side View

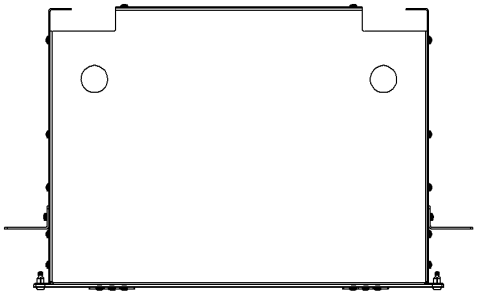

Top View

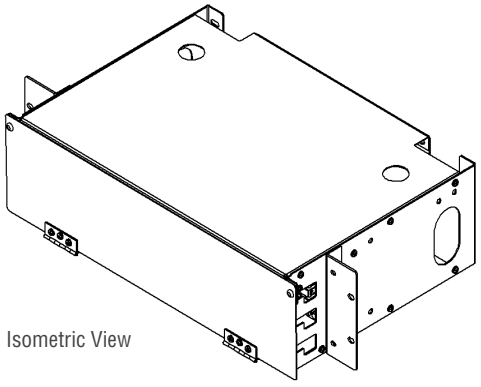

Isometric View

19" D Type Fiber Optic Splice Box							
Product Code	Product Description	(U)	Port	Width(W) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)
AG-FO03U96ST-D-XX	D Type 03U 19" 96 Port ST Fiber Optic Splice Box	03	96	482	240	133	7,2
AG-FO03U96SCS-D-XX	D Type 03U 19" 96 Port SC Simplex Fiber Optic Splice Box	03	96	482	240	133	7,2
AG-FO03U72SCD-D-XX	D Type 03U 19" 72 Port SC Dublex Fiber Optic Splice Box	03	72	482	240	133	7,2
AG-FO04U144ST-D-XX	D Type 04U 19" 144 Port ST Fiber Optic Splice Box	04	144	482	240	177	8
AG-FO04U144SCS-D-XX	D Type 04U 19" 144 Port SC Simplex Fiber Optic Splice Box	04	144	482	240	177	8
AG-FO04U108SCD-D-XX	D Type 04U 19" 108 Port SC Dublex Fiber Optic Splice Box	04	108	482	240	177	8
AG-FO06U216ST-D-XX	D Type 06U 19" 216 Port ST Fiber Optic Splice Box	06	216	482	240	266	9,6
AG-FO06U216SCS-D-XX	D Type 06U 19" 216 Port SC Simplex Fiber Optic Splice Box	06	216	482	240	266	9,6
AG-FO06U162SCD-D-XX	D Type 06U 19" 162 Port SC Dublex Fiber Optic Splice Box	06	162	482	240	266	9,6

XX = Colour Code, B1 White RAL 7035, S1 Black RAL 9005, during order please specify the colour choice

19”RACK SPLICE BOXES E TYPE SERIES

General Structure

E Type Fiber Optic Termination panels, also called as swnig type panel, provide mass cable termination with innovative desgin of openning angle up to 120 degree to enable ease of access for the installation nd rework.

Adapterpanel locaed on the tray with 24, 32, 36, 48, 72, 96, 144 ports options provide easy fiber optic termination with four cable entries, two enries on the sides and two entries on the back.

Besides, f,ber optic cable main line fixing scroll case spacially designed for 1U, 2U and 3U heights is available.

Specifications

Modular structure designed for 19 “ and ETSI optical distiribution frames.
Outstanding cable management and maximum fiber optic termination availability with modular swing structure
12 / 24 ports slim splice casette
Minimum cable movement
Angled adapter module for protection against laser
21” converter side lugs
Magnetic hinged front cover
Tray swinging from left (right hand side option available)
LC, FC, ST, MTRJ, E-2000 etc modules

Includes

1u 21” ETSI converter side lugs 2 pcs
Self-adhesive organizer 5 pcs
M6 screw and nut (4pcs) 1 set
M5 splice cassette nut 1 pcs
50 cm spiral tube 1 pcs
2.5x100mm cablo tie 5 pcs
PG16 gland 2 pcs
Bendable plug 2 pcs

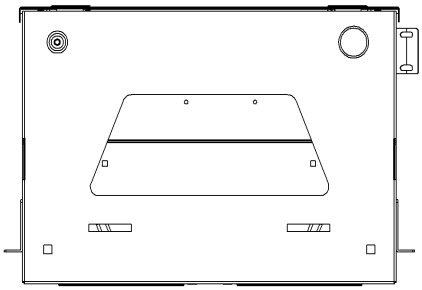

Bottom View



Side View



Front View



Side View



Top View

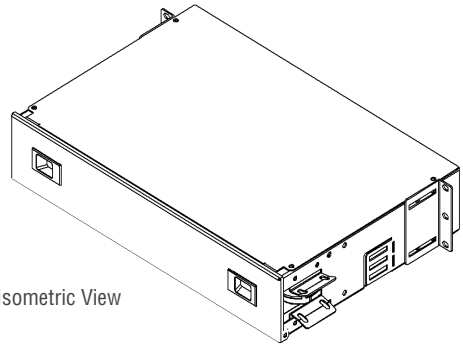

Isometric View

19" E Type Fiber Optic Splice Box							
Product Code	Product Description	(U)	Port	Width(W) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)
AG-FO01U48SCS-E-XX	E Type 01U 19" 48 Port SC Simplex Fiber Optic Splice Box	01	48	482	300	44	4,2
AG-FO01U32SCD-E-XX	E Type 01U 19" 32 Port SC Dublex Fiber Optic Splice Box	01	32	482	300	44	4,2
AG-FO02U96SCS-E-XX	E Type 02U 19" 96 Port SC Simplex Fiber Optic Splice Box	02	96	482	300	88	5
AG-FO02U64SCD-E-XX	E Type 02U 19" 64 Port SC Dublex Fiber Optic Splice Box	02	64	482	300	88	5
AG-FO03U144SCS-E-XX	E Type 03U 19" 144 Port SC Simplex Fiber Optic Splice Box	03	144	482	330	133	6,2
AG-FO03U96SCD-E-XX	E Type 03U 19" 96 Port SC Dublex Fiber Optic Splice Box	03	96	482	300	133	6,2

XX = Colour Code, B1 White RAL 7035, S1 Black RAL 9005, during order please specify the colour choice

19”RACK SPLICE BOXES G TYPE SERIES

General Structure

G Type Fİber Optic Termination Panels provide professional cable management and easy fiber termination availability with the telescopic rail structure and 1U, 2U, 3U, 4U options. Internal tray is installed on telescopic rails to provide a smoother movability inside and outside.

Thanks to the special desgin, the gland lug used on the left and right for cable inlets is removed and the net width of the panel is kept.

Specifications

Telescopic rail system
Managing low and high number of fiber connections with ghigh capacity.
Limited movability for fiber cables and cable safety with glands
Fiber optic guidance tubes to protectand direct the fiber cables to the splice cassettes
Easy installation and access
Cable management for minimum cable bending inside the panel
35mm fiber bending bracket control
PG16 glands (optionally PG21)
Compliance with all types of adapters (SC, FC, ST, LC etc)

Includes

Self-adhesive organizer 5 pcs
M5 splice cassette nut 1 pcs
M6 screw and nut set (4 pcs) 1 set
50cm spiral tube 1 pcs
2,5 x 100mm cable tie 5 pcs
PG16 gland 2 pcs

Bottom View



Side View



Front View



Side View

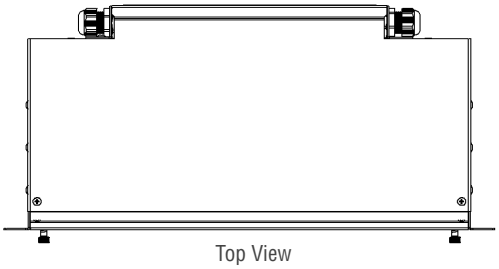

Top View

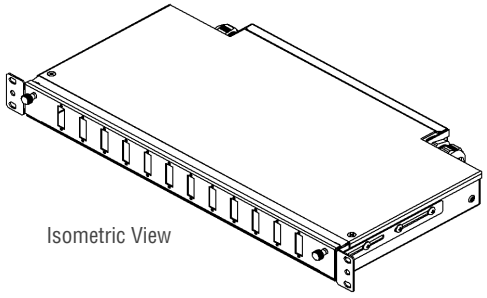

Isometric View

19" G Type(Railed) Fiber Optic Splice Box							
Product Code	Product Description	(U)	Port	Width (W) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (Kg)
AG-F001U12SCS-G-XX	G Type(Railed) 01U 19" 12 Port SC Simplex Fiber Optic Splice Box	01	12	482	240	44	3,5
AG-F001U12SCD-G-XX	G Type(Railed) 01U 19" 12 Port SC Dublex Fiber Optic Splice Box	01	12	482	240	44	3,5
AG-F001U12ST-G-XX	G Type(Railed) 01U 19" 12 Port ST Fiber Optic Splice Box	01	12	482	240	44	3,5
AG-F001U24SCS-G-XX	G Type(Railed) 01U 19" 24 Port SC Simplex Fiber Optic Splice Box	01	24	482	240	44	3,5
AG-F001U24SCD-G-XX	G Type(Railed) 01U 19" 24 Port SC Dublex Fiber Optic Splice Box	01	24	482	240	44	3,5
AG-F001U24ST-G-XX	G Type(Railed) 01U 19" 24 Port ST Fiber Optic Splice Box	01	24	482	240	44	3,5
AG-F002U48ST-G-XX	G Type(Railed) 02U 19" 48 Port ST Fiber Optic Splice Box	02	48	482	240	88	4,2
AG-F002U48SCS-G-XX	G Type(Railed) 02U 19" 48 Port SC Simplex Fiber Optic Splice Box	02	48	482	240	88	4,2
AG-F002U48SCD-G-XX	G Type(Railed) 02U 19" 48 Port SC Dublex Fiber Optic Splice Box	02	48	482	240	88	4,2
AG-F003U72SCS-G-XX	G Type(Railed) 03U 19" 72 Port ST Fiber Optic Splice Box	03	72	482	240	133	6,2
AG-F003U72SCD-G-XX	G Type(Railed) 03U 19" 72 Port SC Simplex Fiber Optic Splice Box	03	72	482	240	133	6,2
AG-F003U72ST-G-XX	G Type(Railed) 03U 19" 72 Port SC Dublex Fiber Optic Splice Box	03	72	482	240	133	6,2

XX = Colour Code, B1 White RAL 7035, S1 Black RAL 9005, during order please specify the colour choice

19”RACK H TYPE SERIES

General Structure

H Type Fiber Optic Termination panels offer professional cable management and easy fiber optic termination availability with the front cable manager, swing opening, aluminum and carbon steel options. Carriage system developed for high capacity termination works is the most useful design developed with modem splice and superior cable management.

Specifications

Modular structure desgined for 19’’ and 21’’ ETSIoptical distribution frames
Swing type aluminum tray
Outstanding cable management with maximum fiber optic termination availability
Compatible adapters (SC / LC) 96 ports
Magnetic lock system (easily opened and closed)
Minimum cable movement
Plastic plug
12 ports splice cassettes
Swing type front cable manager
Limited movability for fiber cables and cable safety with glands
Cable management for minimum cable bending inside the panel
Fiber optic guidance tubes to protect and direct the fiber cables to the splice cassettes
35mm fiber bending bracket control
PG16 glands (optionally PG21)
Compliance with all types of adapters (SC, FC, ST, LC etc)

Includes

1U 21’’ ETSI converter side lugs 2 pcs
1U 19’’ rear side lugs 2 pcs
Self-adhesive hooks 5 pcs
M6 screw and nut set (4 pcs) 1 set
M4x10 cage nut 2 pcs
50 cm spiral tube 1 pcs
2.5x100mm cable tie 1 pcs
PG16 gland 1 pcs
PG16 dummy plug 1 pcs

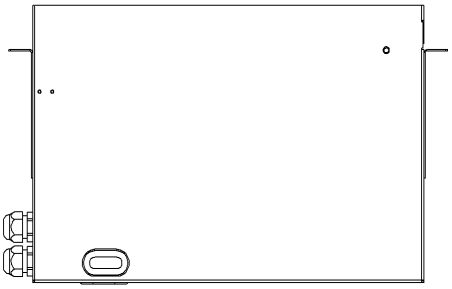

Bottom View



Side View

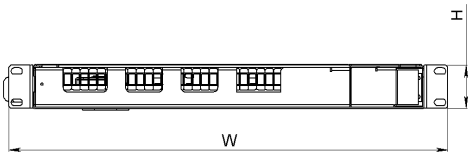

Front View



Side View

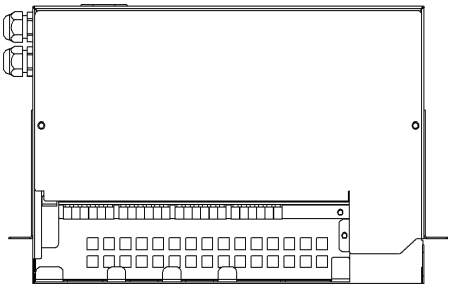

Top View

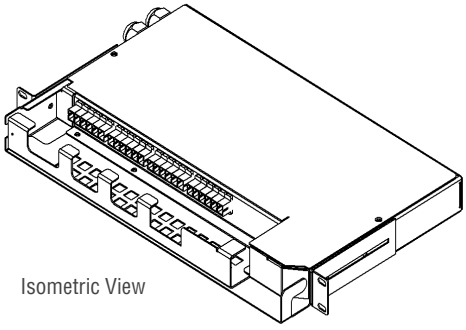

Isometric View

19" H Type Fiber Optic Splice Box							
Product Code	Product Description	(U)	Port	Width(W) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)
AG-F001U12SCS-H-XX-ALM	H Type 01U 19" 12 Port SC Simplex Fiber Optic Splice Box ALM	01	12	482	285	44	2,1
AG-F001U12SCS-H-XX	H Type 01U 19" 12 Port SC Simplex Fiber Optic Splice Box	01	12	482	285	44	4
AG-F001U24SCS-H-XX-ALM	H Type 01U 19" 24 Port SC Simplex Fiber Optic Splice Box ALM	01	24	482	285	44	2,1
AG-F001U24SCS-H-XX	H Type 01U 19" 24 Port SC Simplex Fiber Optic Splice Box	01	24	482	285	44	4
AG-F001U12SCD-H-XX-ALM	H Type 01U 19" 12 Port SC Dublex Fiber Optic Splice Box ALM	01	12	482	285	44	2,1
AG-F001U12SCD-H-XX	H Type 01U 19" 12 Port SC Dublex Fiber Optic Splice Box	01	12	482	285	44	4
AG-F002U48SCS-H-XX-ALM	H Type 02U 19" 48 Port SC Simplex Fiber Optic Splice Box ALM	02	48	482	285	88	2,8
AG-F002U48SCS-H-XX	H Type 02U 19" 48 Port SC Simplex Fiber Optic Splice Box	02	48	482	285	88	4,7
AG-F002U48SCD-H-XX-ALM	H Type 02U 19" 48 Port SC Dublex Fiber Optic Splice Box ALM	02	48	482	285	88	2,8
AG-F002U48SCD-H-XX	H Type 02U 19" 48 Port SC Dublex Fiber Optic Splice Box	02	48	482	285	88	4,7

XX = Colour Code, B1 White RAL 7035, S1 Black RAL 9005, during order please specify the colour choice

WALL TYPE - A Type FIBER OPTIC DISTRIBUTION BOX

General Structure

A Type - Wall Type Fiber Optic Distribution Box have a unique structure with the hinged splice cassette design. Due to the movable cassette, intervention and installation on the port module hidden below is easy.

Includes

1xM6 screw and nut set(4pcs)
1xPG16 PVC Gland



Bottom View

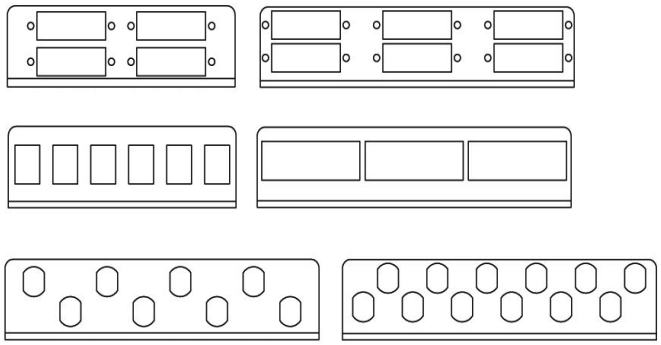

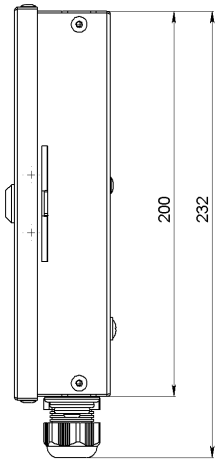

Side View

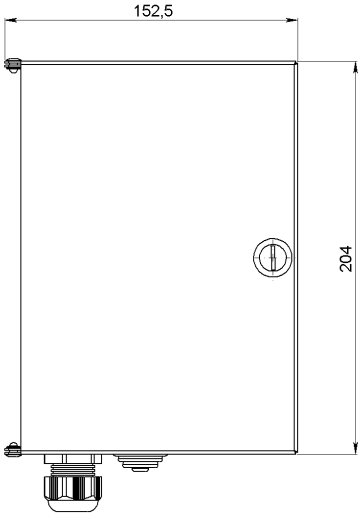

Front View



Side View

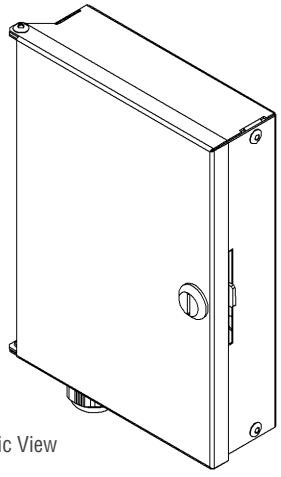

Isometric View

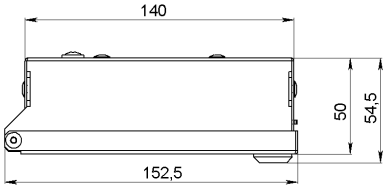

Top View

Wall Type - A Type Fiber Optic Distiribution Box						
Product Code	Product Description	Port	Width (W) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)
AG-PB04PSCD-A-XX	A Type 4 Port Wall Type SC Dublex Fiber Optic Distiribution Box	4	140	200	50	0,8
AG-PB06PSCD-A-XX	A Type 6 Port Wall Type SC Dublex Fiber Optic Distiribution Box	6	140	200	50	0,8
AG-PB04PSCS-A-XX	A Type 4 Port Wall Type SC Simplex Fiber Optic Distiribution Box	4	140	200	50	0,8
AG-PB06PSCS-A-XX	A Type 6 Port Wall Type SC Simplex Fiber Optic Distiribution Box	6	140	200	50	0,8
AG-PB12PSCS-A-XX	A Type 12 Port Wall Type SC Simplex Fiber Optic Distiribution Box	12	140	200	50	0,8
AG-PB08PST-A-XX	A Type 8 Port Wall Type ST Fiber Optic Distiribution Box	8	140	200	50	0,8
AG-PB12PST-A-XX	A Type 12 Port Wall Type ST Fiber Optic Distiribution Box	12	140	200	50	0,8

XX = Colour Code, B1 White RAL 7035, S1 Black RAL 9005, during order please specify the colour choice

WALL TYPE - B Type FIBER OPTIC DISTRIBUTION BOX

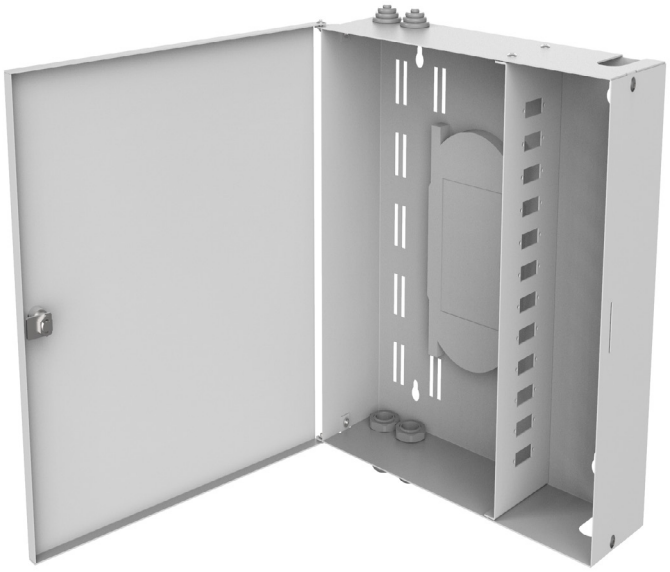

General Structure

B Type - Wall Type Fiber Optic Distribution Box have a unique structure with the hinged splice cassette design. Due to the movable cassette, intervention and installation on the port module hidden below is easy.

Includes

2xPG16 PVC Gland
2xPG16 Blind Cap

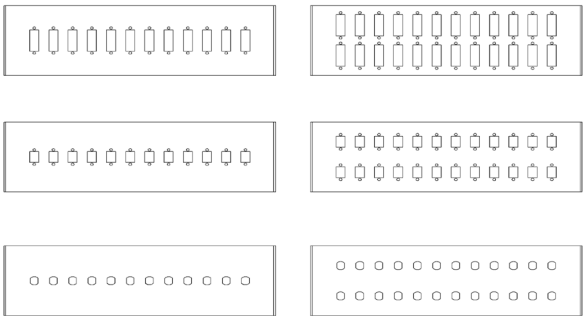

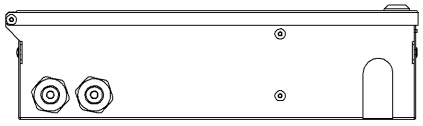

Bottom View

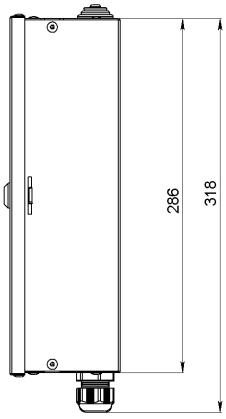

Side View

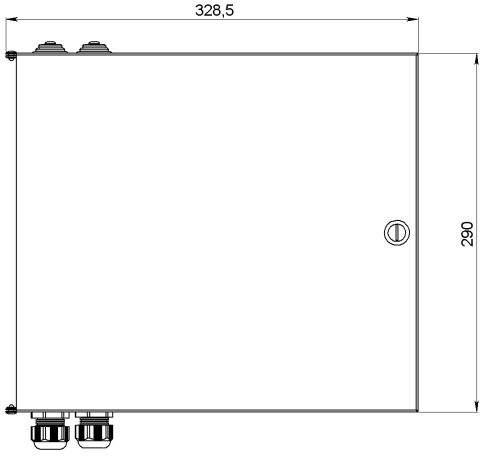

Front View



Side View

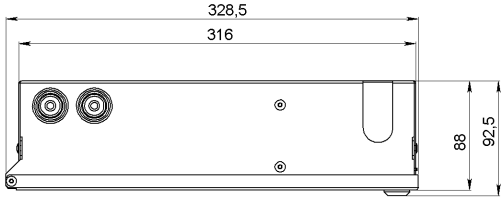

Top View

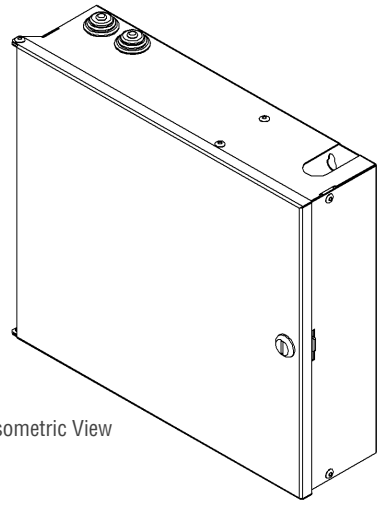

Isometric View

Wall Type - B Type Fiber Optic Distiribution Box						
Product Code	Product Description	Port	Width(W) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)
AG-PB12PSCD-B-XX	B Type 12 Port Wall Type SC Dublex Fiber Optic Distiribution Box	12	316	290	88	2,8
AG-PB24PSCD-B-XX	B Type 24 Port Wall Type SC Dublex Fiber Optic Distiribution Box	24	316	290	88	2,8
AG-PB12PSCS-B-XX	B Type 12 Port Wall Type SC Simplex Fiber Optic Distiribution Box	12	316	290	88	2,8
AG-PB24PSCS-B-XX	B Type 24 Port Wall Type SC Simplex Fiber Optic Distiribution Box	24	316	290	88	2,8
AG-PB12PST-B-XX	B Type 12 Port Wall Type ST Fiber Optic Distiribution Box	12	316	290	88	2,8
AG-PB24PST-B-XX	B Type 24 Port Wall Type ST Fiber Optic Distiribution Box	24	316	290	88	2,8

XX = Colour Code, B1 White RAL 7035, S1 Black RAL 9005, during order please specify the colour choice

WALL TYPE - C Type FIBER OPTIC DISTRIBUTION BOX

General Structure

C Type Fiber Optic Termination Panels are designed for wall mounting with double lockable door and changeable adapter module. The reason for the double doors is to seperate the two sections as one section for adapter inlets and the other for cassette, pigtails, termination and spiral drums. Thus the double locks enable the intervention in only one section. The adapter section width is 145mm while the termination section width is 285mm. Up to 96 fiber optic terminations is possible.

Includes

Self-adhesive hooks 5 pcs
50cm spiral tube 1 pcs
2,5 x 100mm cable tie 5 pcs
PG16 gland 2 pcs
PG16 dummy plug 2 pcs
Fixing plug set 4 pcs



Bottom View

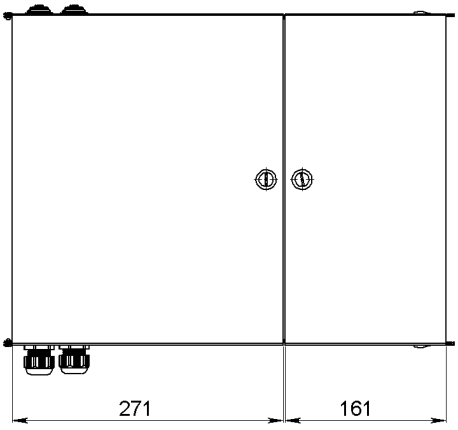

Front View

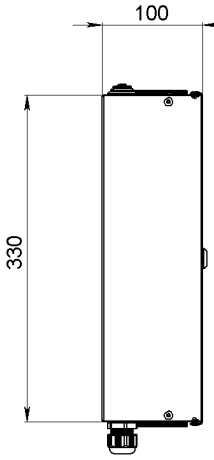

Side View

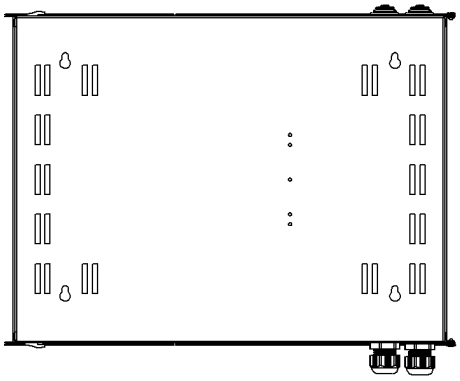

Rear View

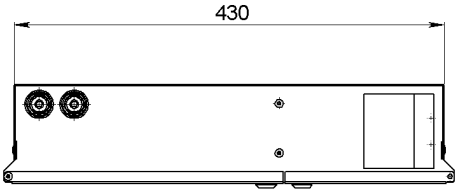

Top View

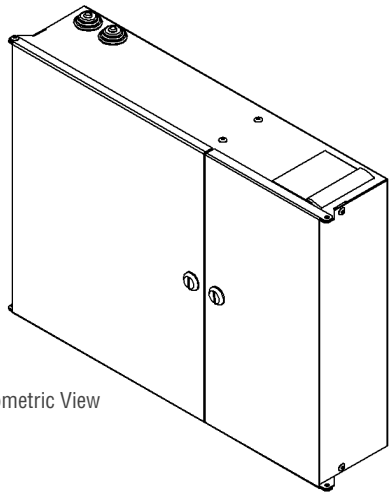

Isometric View

Wall Type - C Type Fiber Optic Distiribution Box						
Product Code	Product Description	Port	Width(W) (mm)	Depth (D) (mm)	Height (H) (mm)	Weight (Net) (kg)
AG-PB96PSCS-C-XX	C Type 96 Port Wall Type Double Doors SC Simplex Fiber Optic Distiribution Box	96	430	100	330	2,8
AG-PB48PSCD-C-XX	C Type 48 Port Wall Type Double Doors SC Dublex Fiber Optic Distiribution Box	48	430	100	330	2,8
AG-PB96PST-C-XX	C Type 96 Port Wall Type Double Doors ST Fiber Optic Distiribution Box	96	430	100	330	2,8

XX = Colour Code, B1 White RAL 7035, S1 Black RAL 9005, during order please specify the colour choice