WALL MOUNTED FIBER OPTIC

Features

Fits comfortably into new and existing Interconnect, cross-connect, customer premise, and co-location environments
Most common connector styles and types available
Compatible with industry standard equipment frames

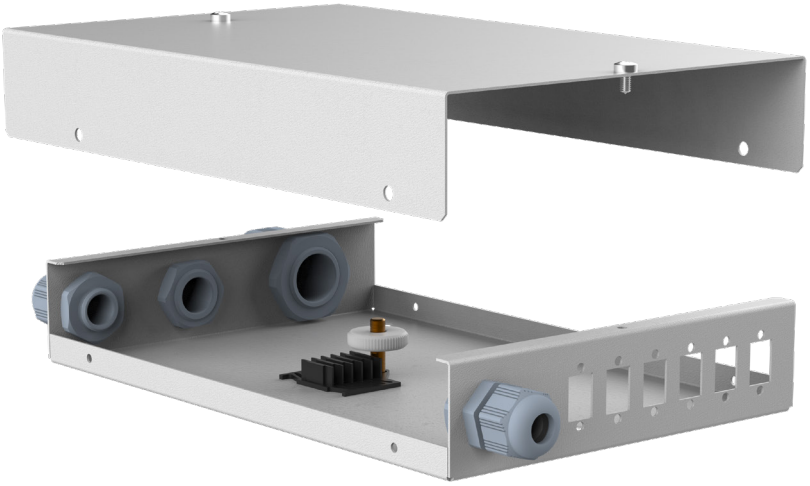

Specifications

Cold rolled steel
Durable textured powder coat finish available in black or white
Standard density: up to 12 fiber,
Standard cable stub location is bottom

Color Options

RAL7035	RAL9005

Technical Dimensions

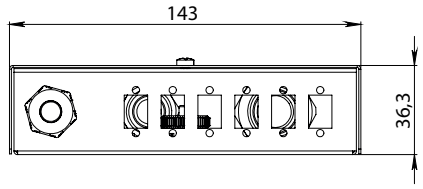

FRONT VIEW

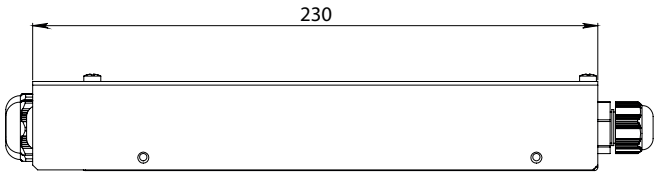

SIDE VIEW

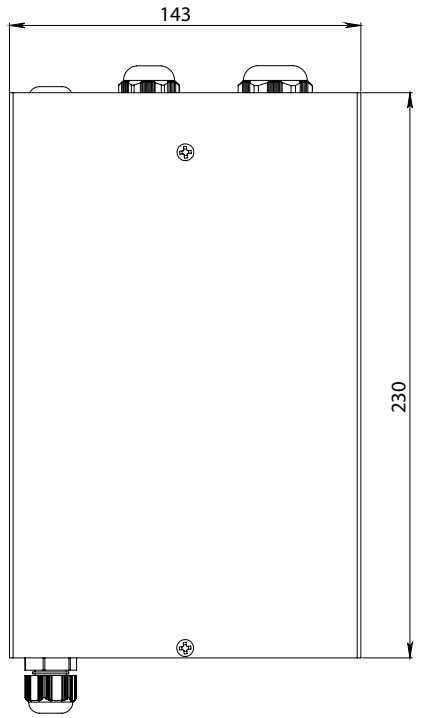

TOP VIEW

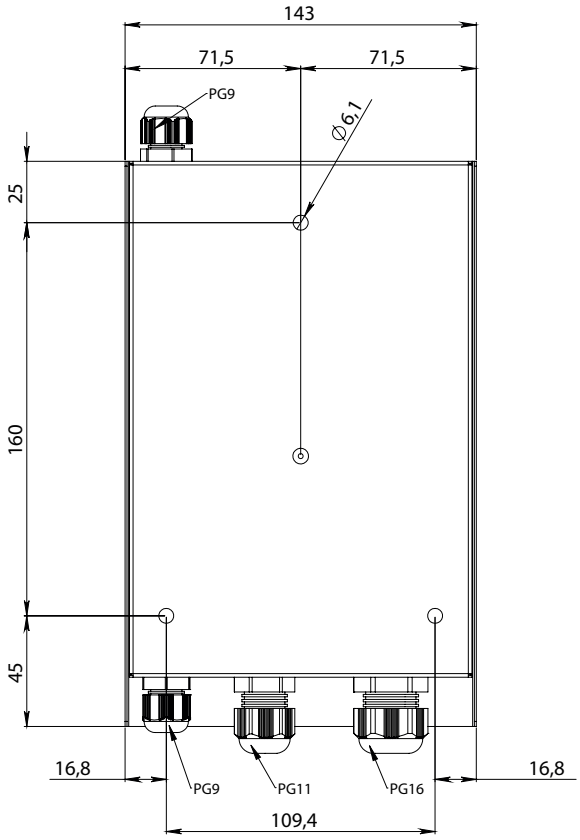

BOTTOM VIEW

AGER WALL MOUNTED FIBER OPTICS						
Product Code	Product Description	Weight (W) (mm)	Depth (D) (mm)	Height(H) (mm)	Weight (Net) (kg)	Weight (Brüt) (kg)
AG-PB04PSCS-D-XX	4 PORT WALL MOUNTED SC SIMPLEX FİBER PATCH BOX D TYPE	113	230	36	540,5	541
AG-PB06PSCS-D-XX	6 PORT WALL MOUNTED SC SIMPLEX FİBER PATCH BOX D TYPE	143	230	36	641,5	642